




EPS Basecoat Adhesive ATLAS GRAWIS U grey 25kg

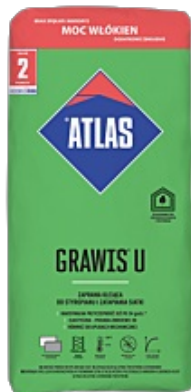

Brand	ATLAS
Manufacturer	
Country of manufacture	Poland
Weight	25.00 kg
Product Code	GRAWIS U
EAN	5905400115901
SKU	8957
Advice IBB	
Application	2 in 1 - adhesive for EPS, XPS application and for mesh embedding
IBB ID	8957

Product specification

Manufacturer	ATLAS	Unit	bag
Brand	atlas	Colour	grey
EAN	5905400115901	Country of manufacture	Poland
Coverage	bonding: up to 5.0 kg / m ² , reinforced layer: up to 3.5 kg / m ²	Relative air humidity during application and curing	< 80%
pH	8	Density of the finished product	ca 1.9 g/cm ³

ATLAS GRAWIS U - 2 in 1: basecoat adhesive for EPS, XPS application and for mesh embedding

Most important features:

- maximum adhesion after only 24 hours
- flexible - with 3D reinforcement
- also for mechanical application
- resistant to scratches and cracks
- fast increase in strength

Product description:

- for fixing EPS thermal insulation boards (white and graphite) and for applying a reinforcement layer on them,
- for fixing of thermal insulation boards with a thickness of up to 50 cm.

Recommended for the insulation of passive and low-energy buildings.

Suitable as a component of thermal insulation systems - can be used for the insulation of new buildings as well as for the thermal rehabilitation of existing buildings.

Main properties:

- Flexible - with 3D reinforcement
- Maximum adhesion after only 24 hours
- Fast increase in strength
- It allows polystyrene to be fixed with adhesive only in buildings up to 12 meters high
- High durability during use
- Optimum formula
- High viscosity
- Excellent bonding

Main parameters:

- Mixing ratio (water/dry mix): 5.25 ÷ 5.75 l/25 kg
- Pot life: approx. 2,5 hours
- Open time: min. 15 minutes